

# INSTRUCTION TRANSFORMER-E



Folding Rear E-Bike Carrier  
Model: BC-6435-2A




www.bearack.com




YouTube Channel

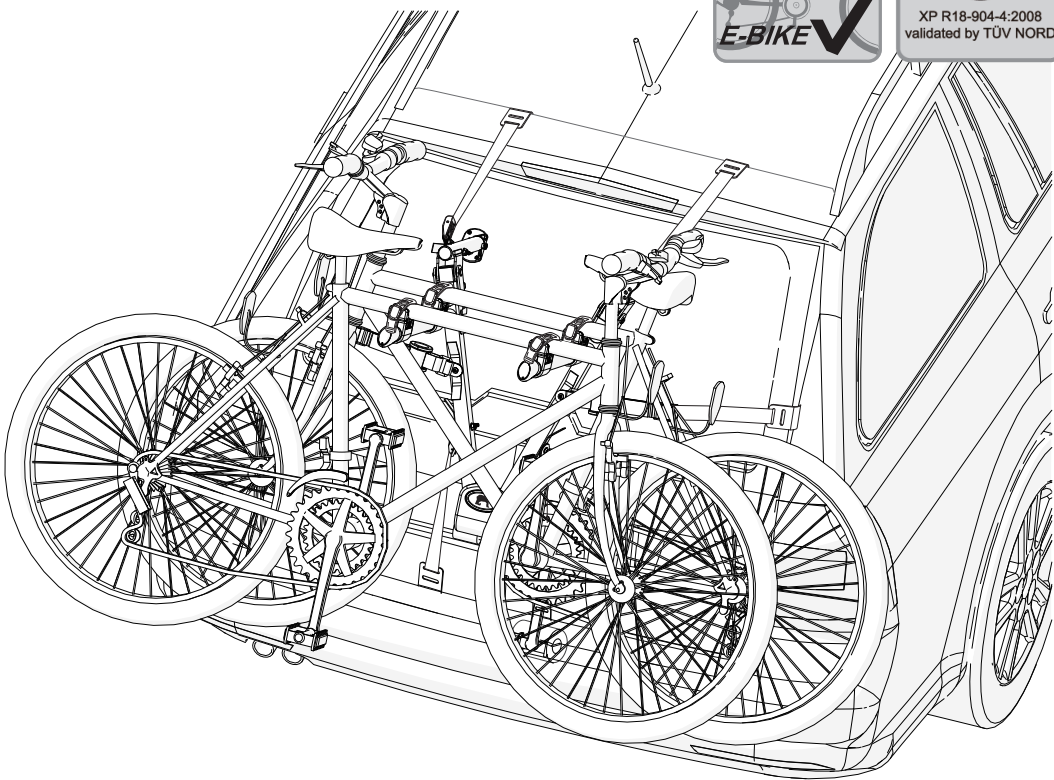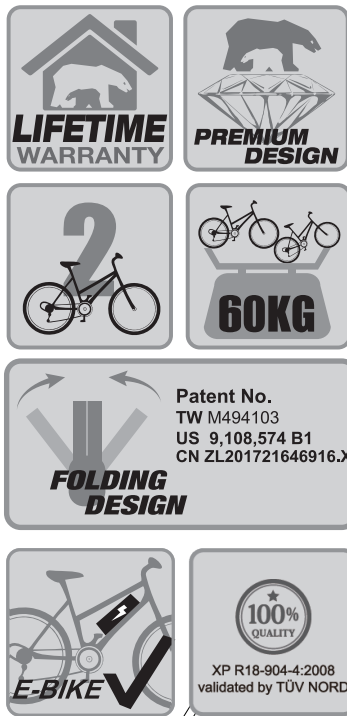

- Thank you for purchasing BEARACK , please check all parts are included in the package. If there is anything missing or defective, please contact our authorized dealers.

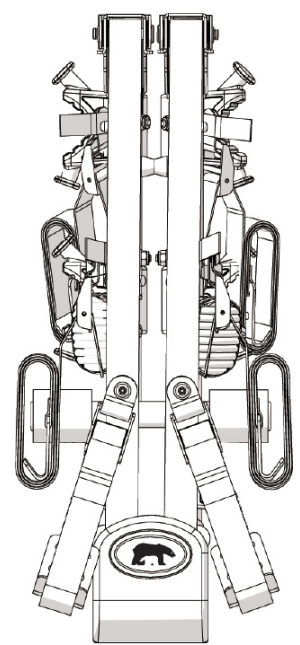


x1




x6




x1



x1




x3



x1


- Move the bike supporting arms up and make sure the push button is engaged.

1

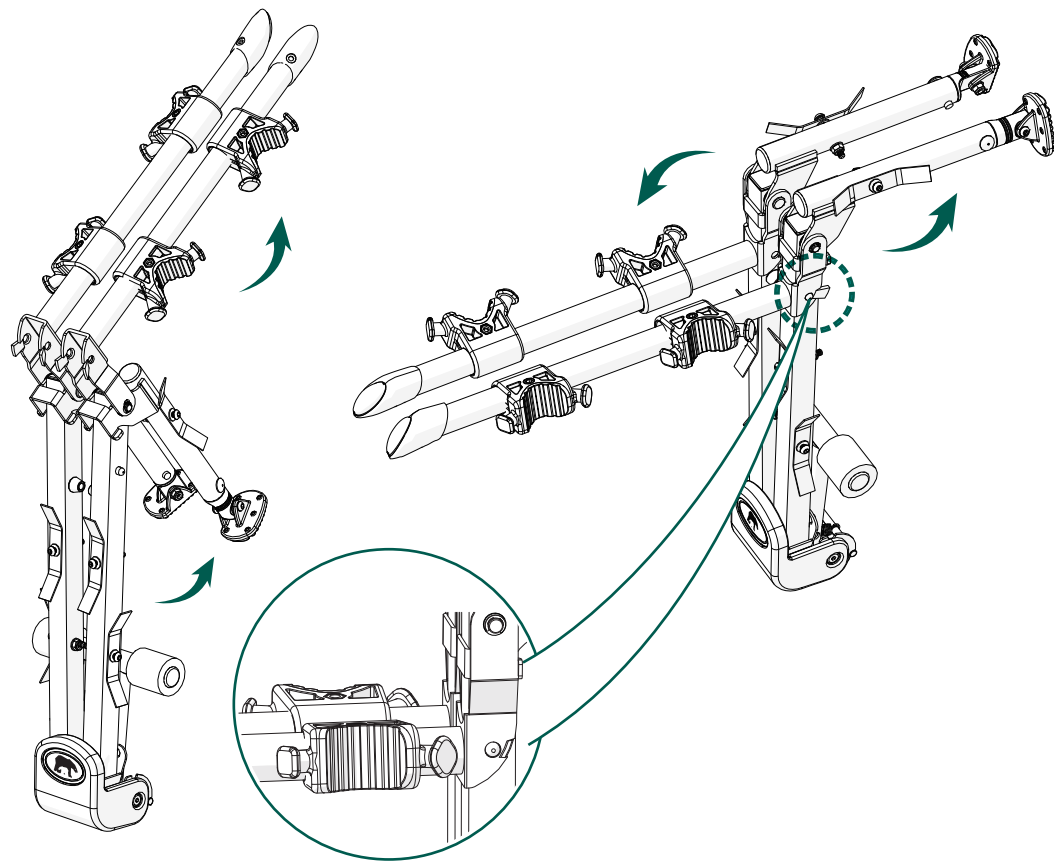


- Open up the main frame to V shape and make sure the push button is engaged.

3

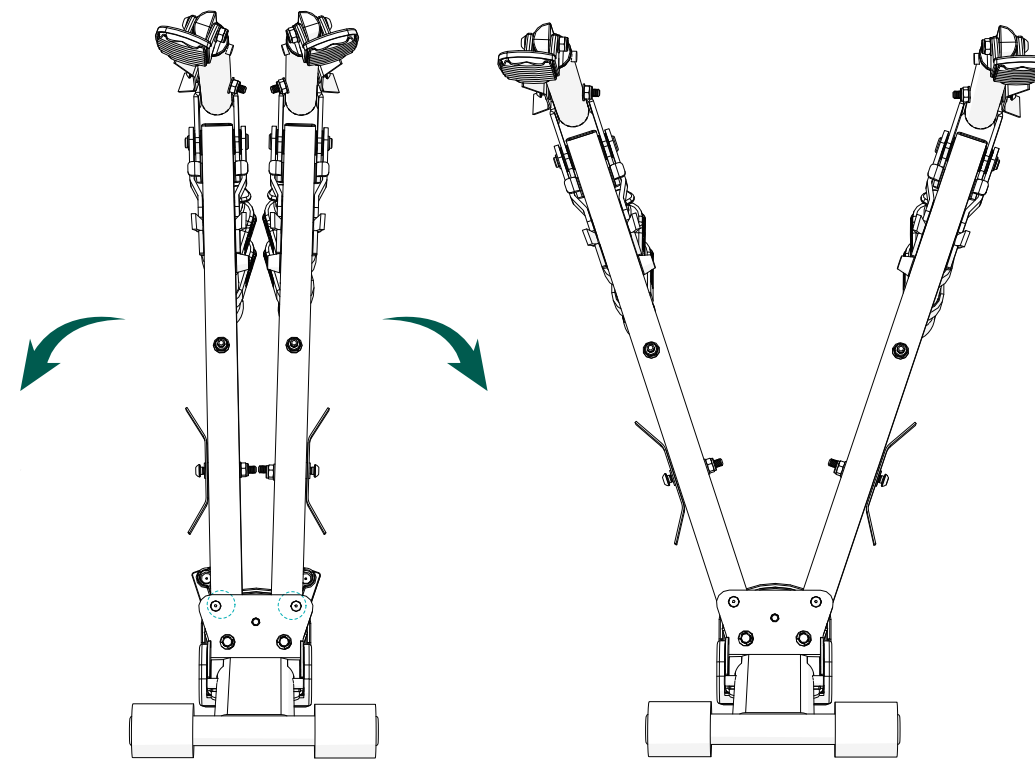


- Lower the bottom support by pulling it upward then bring it downward. The button support will automatically engage it.

2

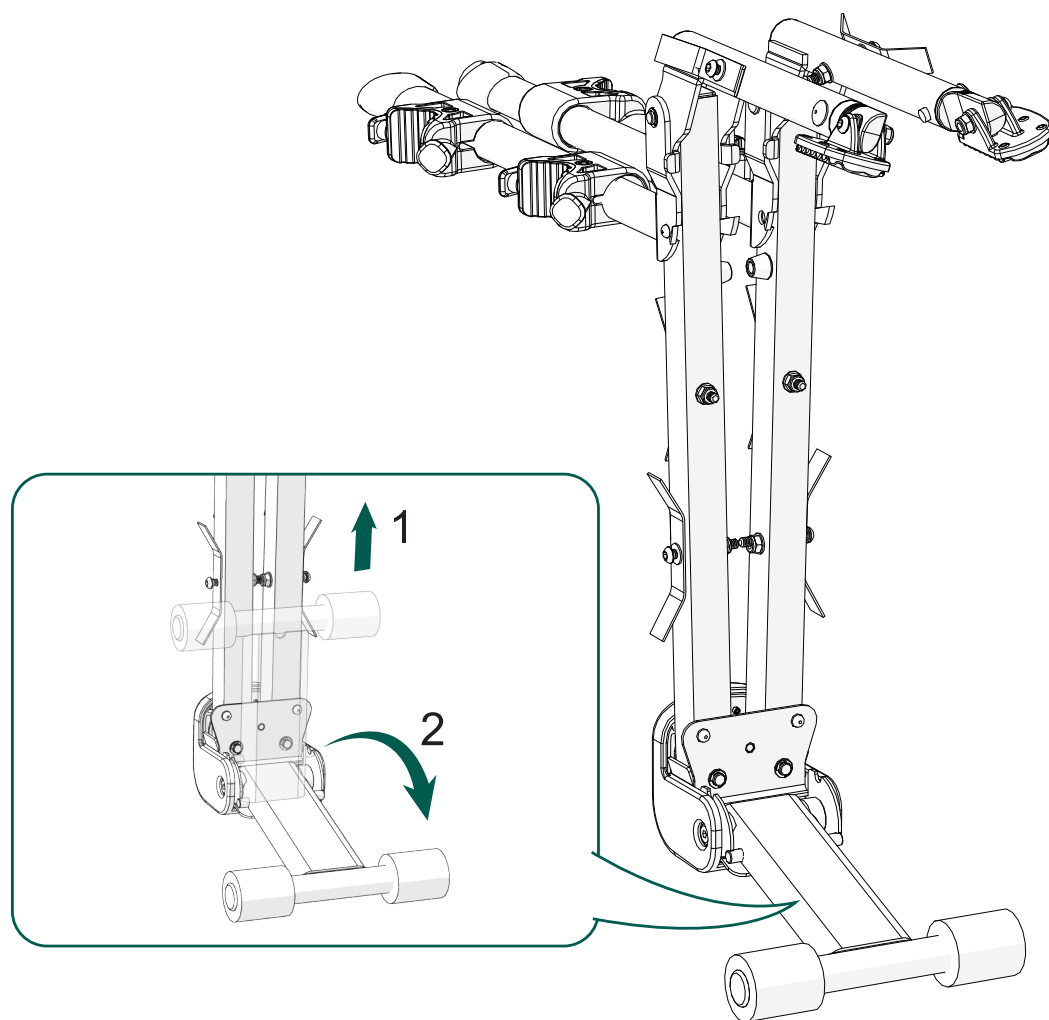


- Rotate the upper foot pad upward.

4-a

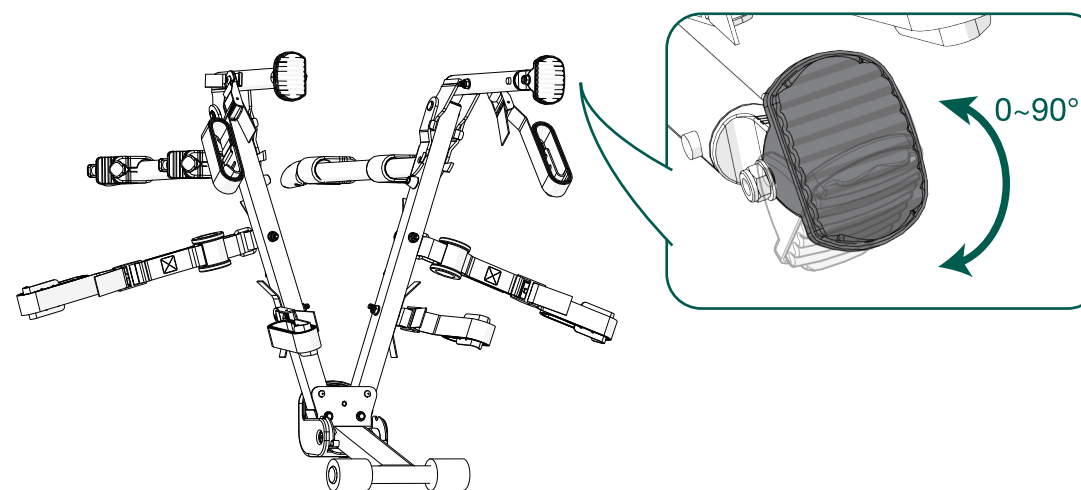


- Turn the bike holders vertically.


4-b

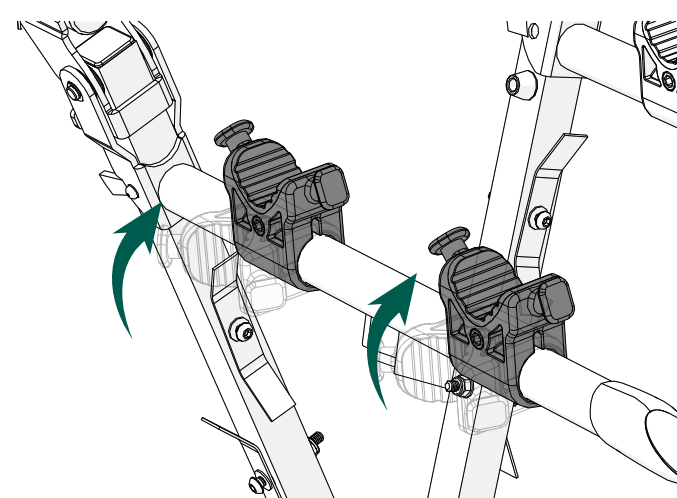


## Before Installing the Hooks

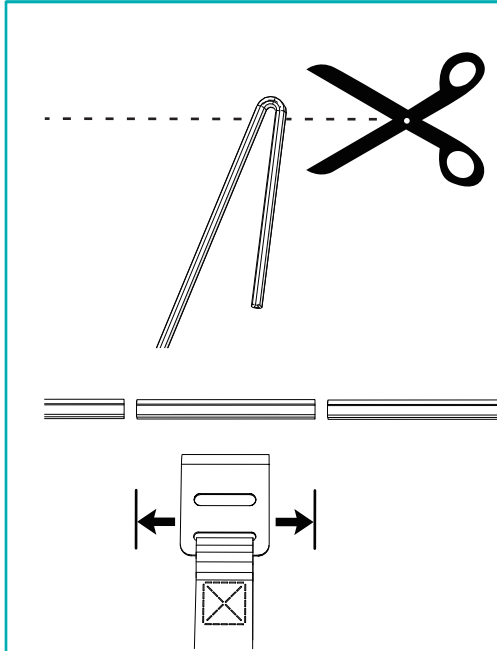

- Cut enclosed rubber strip into the length WIDER than hook.

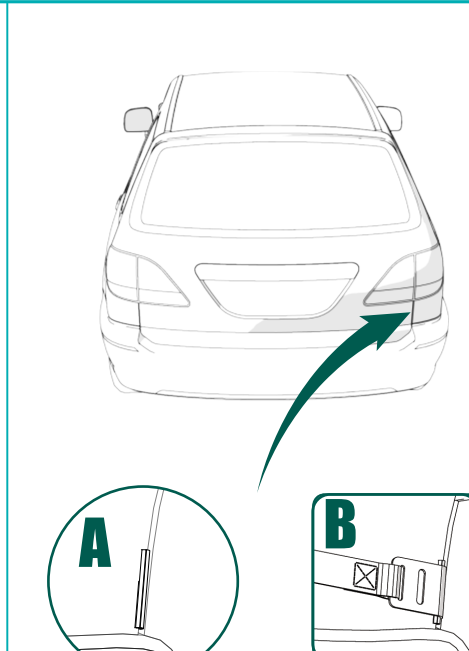




- Insert the rubber strips to door edge then put the hooks over them.

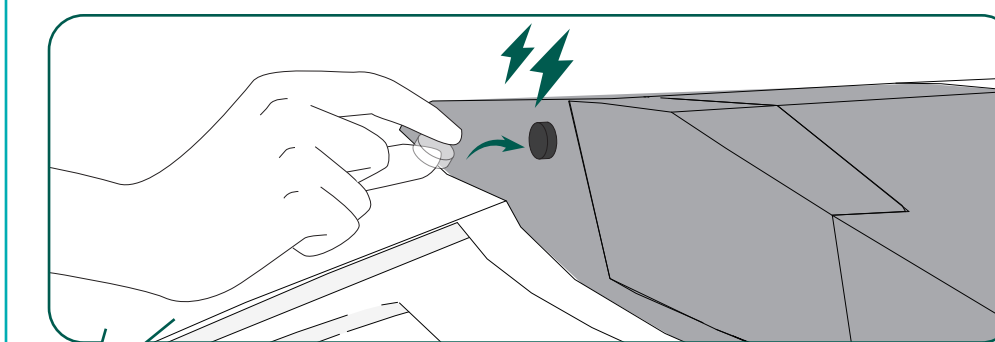

- Test your spoiler with the magnetic packed in our accessory bag, and complete the installation with metallic spoiler. If your spoiler is not metallic, please contact your local agent for consultation.

- Pulling the straps hard to tighten them. Now the rack is secured to the trunk lid.


5

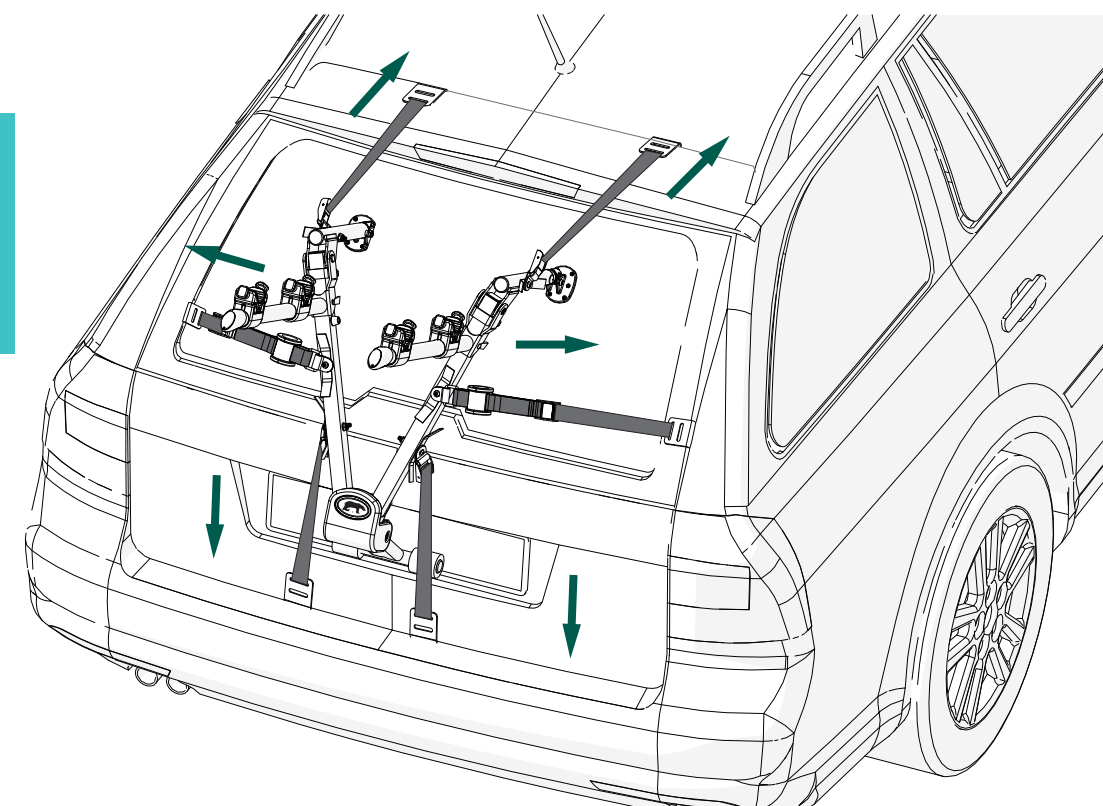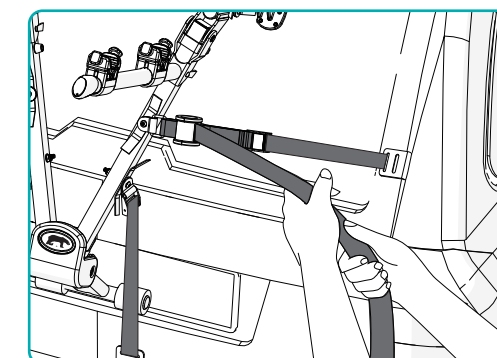




■ Mount the bikes alternatively.

# 6-a

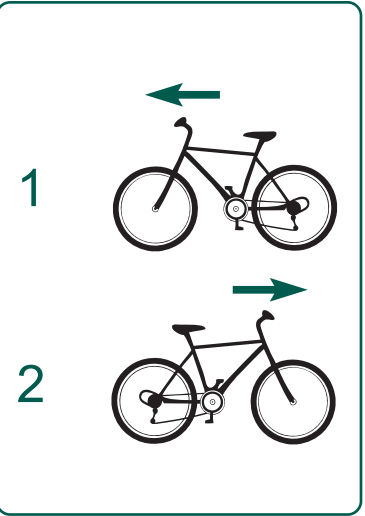


■ The bike holder can be adjusted to any angle or any distance to fit the bike frames. Then tighten the bike holders with Allen Key.

# 6-b

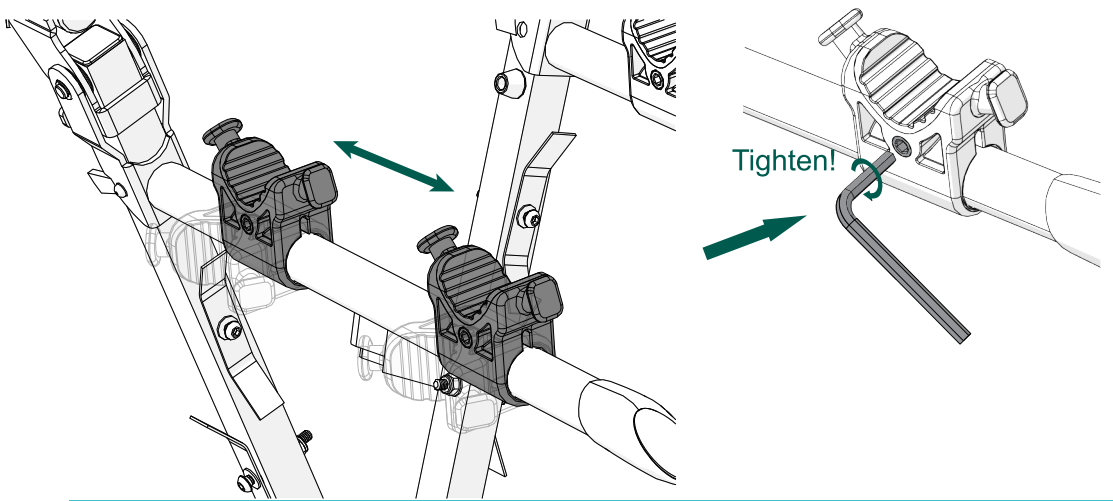


■ Use a rubber strap at each side to secure the bike.


# 6-c

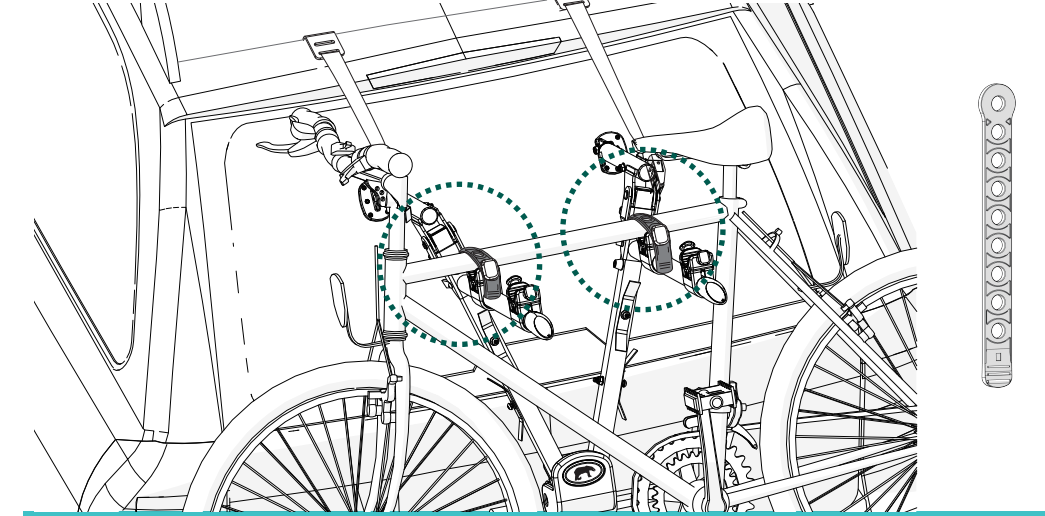

■ Use protective foam pads to prevent scratches.




# 6-d

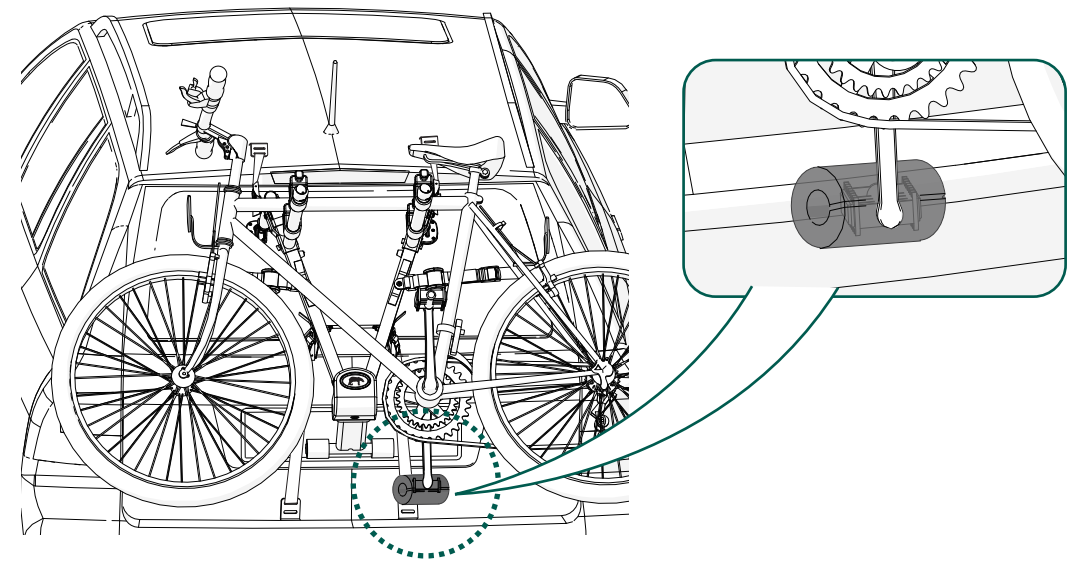


■ Make sure the straps are retightened after mounting the bikes.


# 6-e

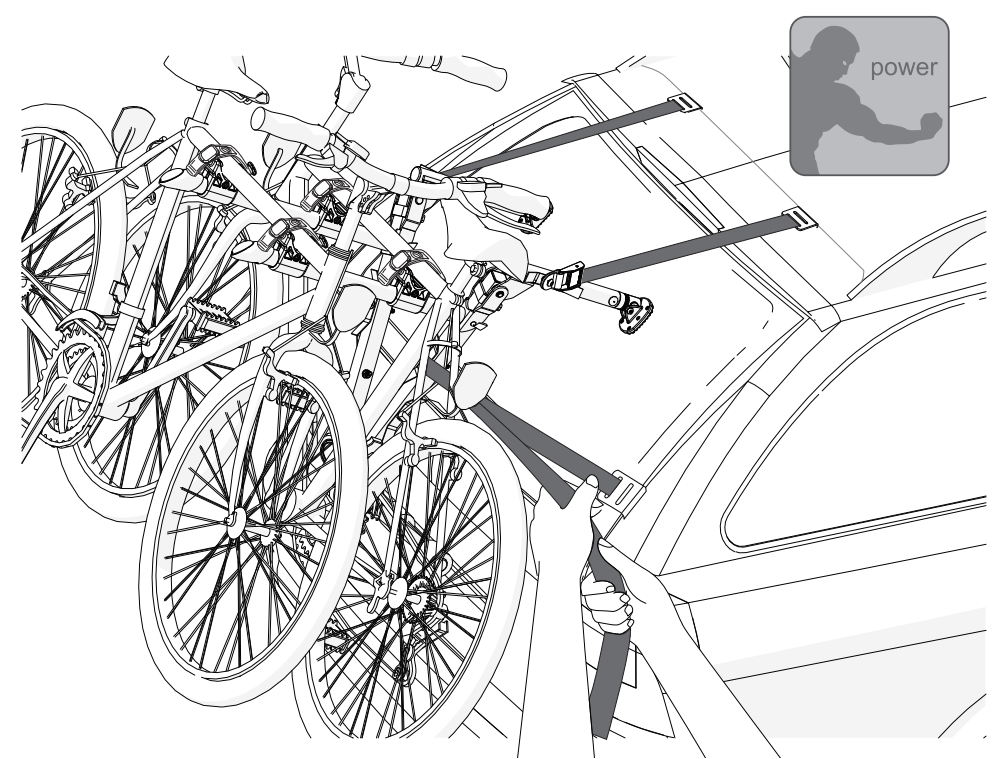


Noted! The rest of straps can be organized by the integrated Velcro Straps.

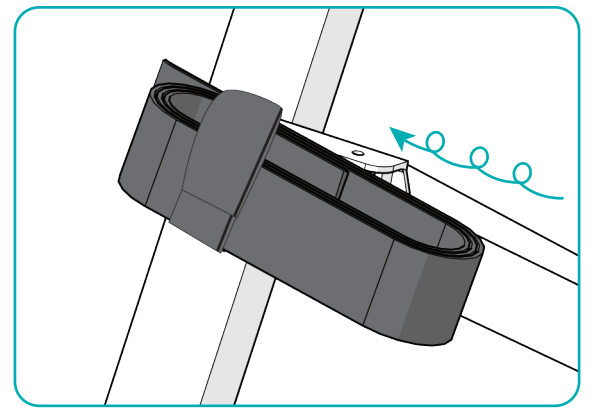

■ Divide the safety strap to half and loop it over the frame. Bring it forward to secure wheels and forks.




# 7

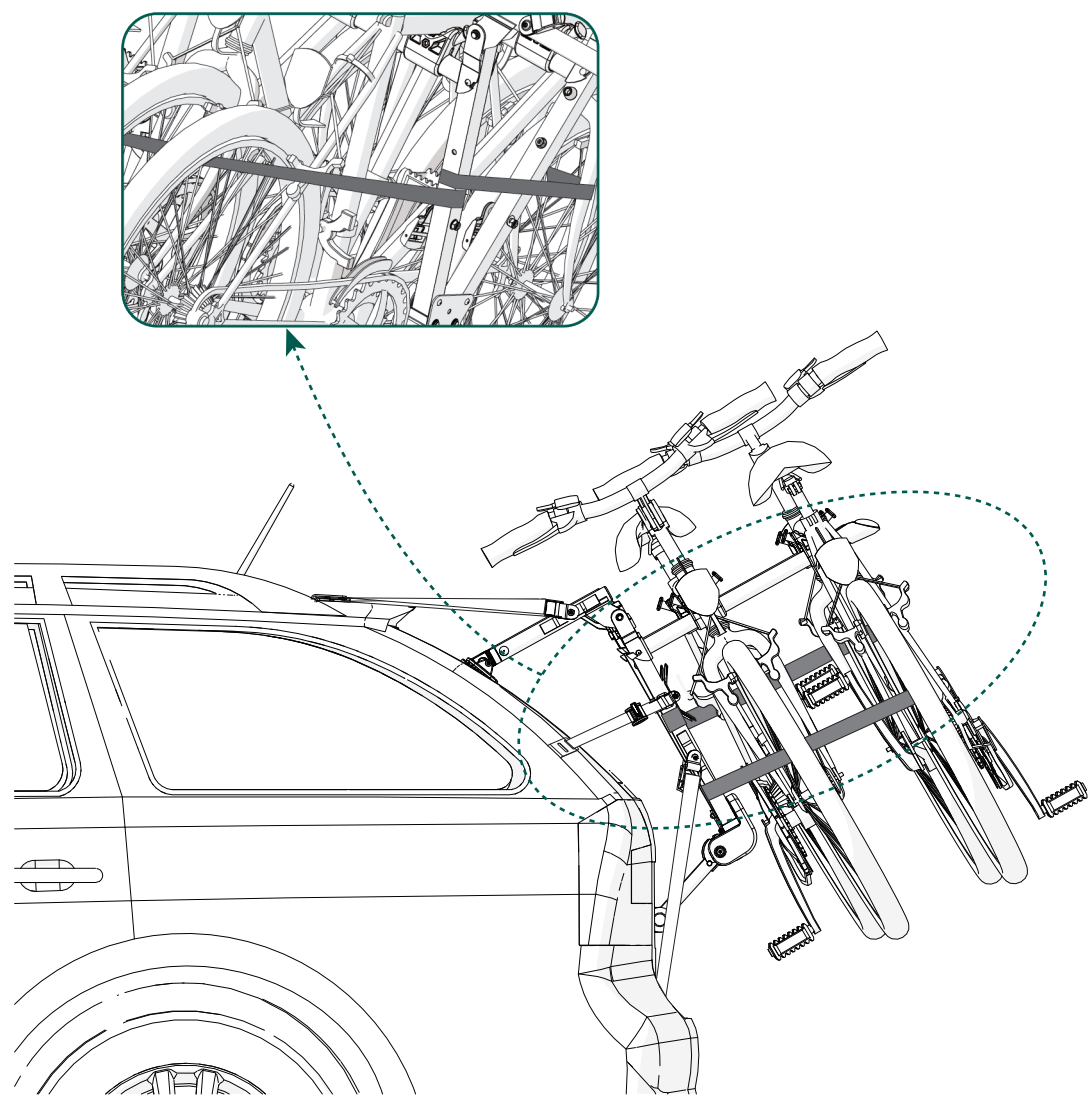


■ The safety strap is tightened against the buckle.  
**Noted!** The rest of straps can be organized by the integrated Velcro Straps.


# 8

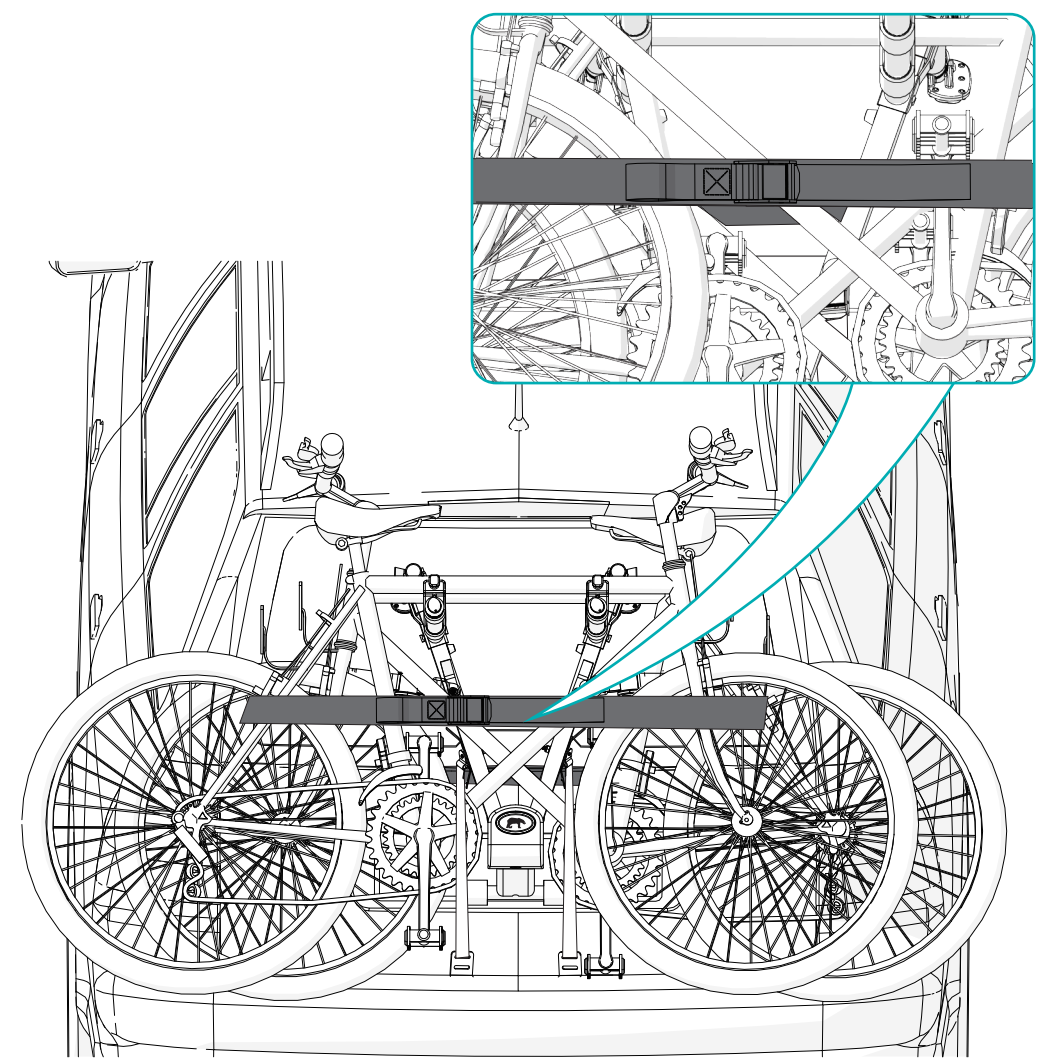


AP-527  
■ Use for bikes hard to mount

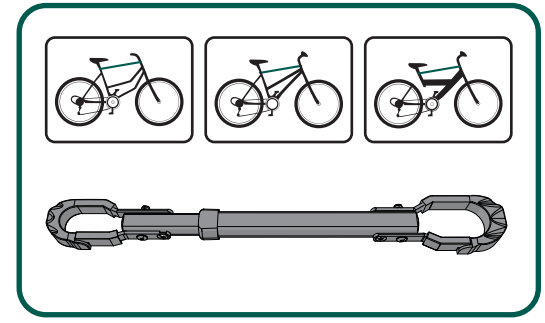


AP-3857  
■ Replacement rubber straps

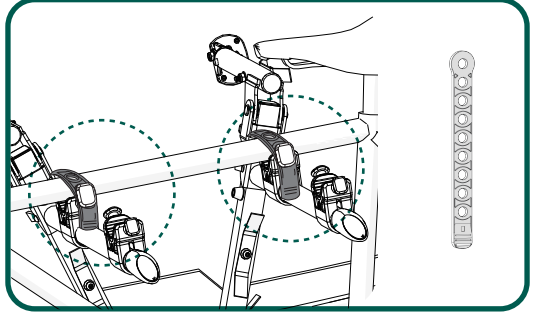

AP-516  
■ Replace standard hooks

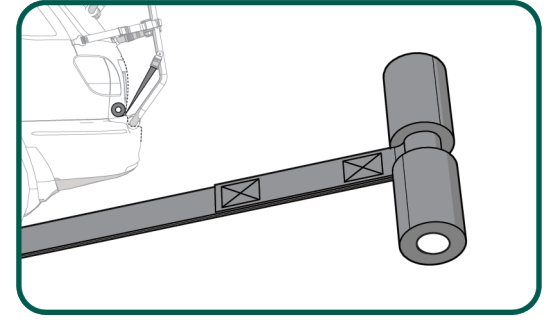


AP-3288-A  
■ Providing protection for your car's and bicycles' paint jobs.

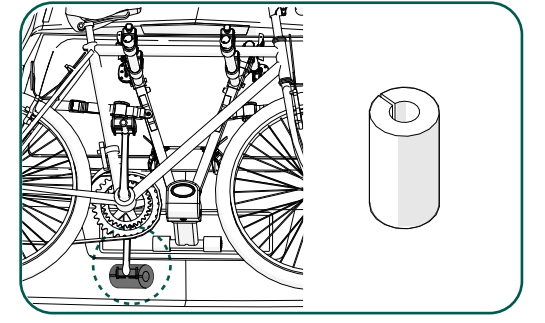

■ Installation complete.

# 9

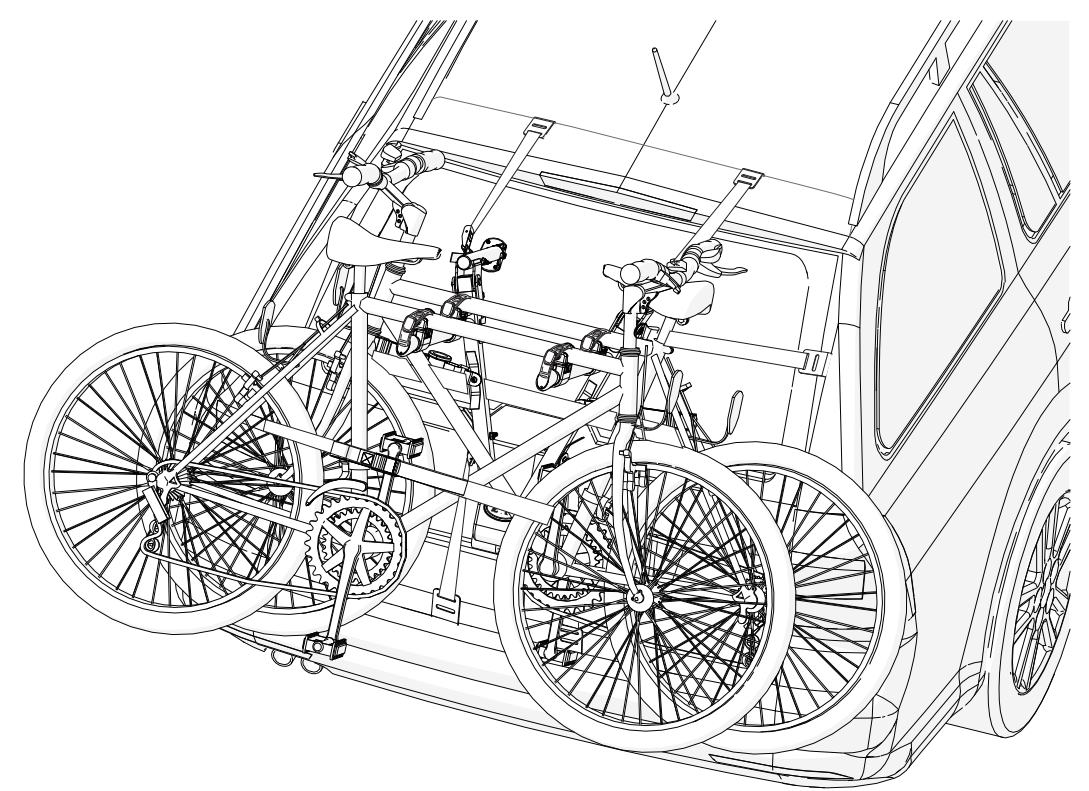

English

## General Notes for Trunk Rack

1. This carrier has been designed and manufactured to attach securely to a variety of vehicles. The attachment of this carrier to a vehicle is safely critical and beyond the control of the manufacturer. The user must therefore ensure that the cycle carrier is suitable for using with their particular vehicle and that both carrier and cycles are securely and safely attached to the vehicle.
2. During the journey, frequently check the tension of carrier fixing the straps and the security of the cycles carried. Before mounting bicycles, please remove all loose items. Ex: Water bottles.
3. Be cautious that the bicycle and bicycle carrier do not come close to exhaust pipe of the vehicle.
4. This bike carrier is intended for carrying a maximum of 2 bikes and a mass of 60 kg. Do not over load it. This carrier is not allowed to carry recumbent.
5. The bicycles shall be evenly distributed over the rear bicycles carrier, and load center of gravity kept as low as possible. Load, which over hang the ends of the carrier system, shall conform to any relevant regulation, and shall be adequately secured.
6. Maintain this equipment in good working order and replace any worn plastic and rubber part.
7. Please, remind the handling characteristics if a vehicle will change when a rear bicycle carrier is fitted and especially when it's loaded. Do not drive off road. Reduce the speed when on rough or dirt road.
8. This bicycle carrier is designed for temporary use only, remove when not in use or before going through a car wash.
9. When the national law requires that the light and license plate cannot be obscured, it's necessary to mount the auxiliary light and license board. (sold separately)
10. Retain this instructions manual for future references and ensure that any other users of this bike carrier are familiar with their content.
11. Before your journey, check the loads are secured correctly and safety.
12. The rack is warranted with a limited lifetime warranty starting from purchasing date. The plastic material accessories are two years warranty.
13. The max speed is 90 km/hr, driving slowly while vehicle crossing pothole (10km/h), and Belgium block (20km/h)
14. When vehicles are equipped with power tailgate, it is necessary to turn off the power when you install rear bike carrier. If this option is not available, do not use rear bike carrier.
15. It is necessary to change the installation method of bike carrier when the vehicle is equipped with spoiler. Please check with authorized dealer or distributor if this occurs.
16. Some of bicycles, such as women's bikes, which requires additional bike adapter bar to mount. It's sold separately.